


Android Data Terminal OS Updating Instruction

I. Preparation:


1. Updating Software: SP_Flash_Tool_exe_Windows_v5.1936.00.000;
2. System File: 20160708_PDA_4G_ctp_0801 (the version information would be different based on the actual system version) downloaded from the link the supplier provided and copy the rar folder to disk D or E or F, rather than the desktop.
3. Updating Driver: MTK_USB_All_1.0.4 (windows xp and windows 7);
4. Windows PC;

II. Updating Steps:

1. Install the driver: Open the rar file of MTK_USB_All_1.0.4;
2. Go to 'DriverInstaller' and double click to install;

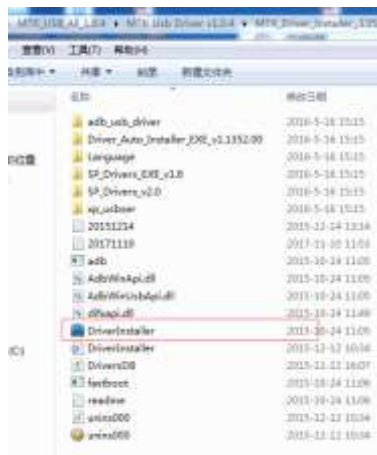

3. Shutdown the device and remove the battery(for pda), remove the USB cable;
4. Open the exe file of 'Flash_Tool' within the file of 'SP_Flash_Tool';;

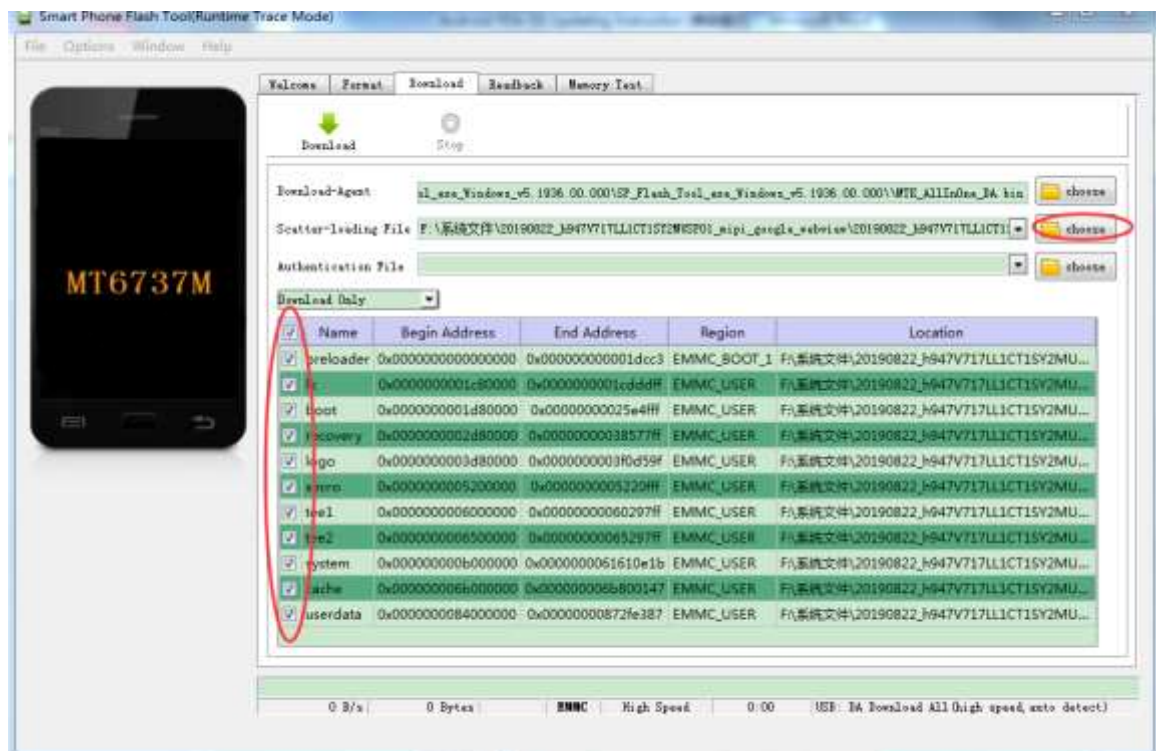

Click 'choose', select the file of 'MT6737M_Android_scatter' in the system files(we use this



as the example)'and select all, then click Download, please keep the default option of 'Download Only';

5. Plug the USB cable, and do not boot the device, then the device would update automatically, finally we would get the following information after about 4 minutes when updating successfully;

<input checked="" type="checkbox"/>	Name	Begin Address	End Address	Region	Location
<input checked="" type="checkbox"/>	preloader	0x0000000000000000	0x00000000001dccc3	EMMC_BOOT_1	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	lk	0x0000000001c80000	0x0000000001cdddf	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	boot	0x0000000001d80000	0x00000000025e4fff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	recovery	0x0000000002d80000	0x00000000038577ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	logo	0x0000000003d80000	0x0000000003fd59f	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	secro	0x0000000005200000	0x0000000005220ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	tee1	0x0000000006000000	0x00000000060297ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	tee2	0x0000000006500000	0x00000000065297ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	system	0x000000000b000000	0x00000000061610e1b	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	cache	0x0000000006b000000	0x0000000006b800147	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	userdata	0x0000000084000000	0x00000000872fe387	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...

Download Flash 9%					
11.74M/s	138.60M	EMMC	High Speed	0:17	PreLoader USB VCOM Port (COM7)

Smart Phone Flash Tool(Runtime Trace Mode)

File Options Window Help

Welcome | Format | Download | Readback | Memory Test

Download-Agent: d3_exe_windows_v5.1936.00.000\SP_Flash_Tool_exe_windows_v5.1936.00.000\WTR_AllInOne_Dk bin [choose]

Scatter-loading File: F:\系统文件\20190822_h947V717LL1CT1SY2MU\spi_google_svbview\20190822_h947V717LL1CT1 [choose]

Authentication File: [choose]

Download Ok

	End Address	Region	Location
<input checked="" type="checkbox"/>	00000000001dccc3	EMMC_BOOT_1	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	0000000001cdddf	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	00000000025e4fff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	00000000038577ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	0000000003fd59f	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	0000000005220ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	00000000060297ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	00000000065297ff	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	00000000061610e1b	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	0000000006b800147	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...
<input checked="" type="checkbox"/>	00000000872fe387	EMMC_USER	F:\系统文件\20190822_h947V717LL1CT1SY2MU...

Download Flash 100%

10.55M/s | 1.42G | EMMC | High Speed | 2:23 | PreLoader USB VCOM Port (COM7)

Note: If the upgrading failed, please try by 'Firmware Upgrade', and please do not boot the device when updating.

